


ACCESSORIES

MK	QTY	SIZE	DESCRIPTION
A	4	3/16	3/8" DIAMETER AIRCRAFT GRADE CABLE GALVANIZED OR STAINLESS (TOP CABLE AS REQUIRED)(BOTTOM CABLE CUT TO 3') 4 REQUIRED
B	32	3/16	3/8" CABLE SIZE SWAGE FITTINGS ALUMINUM OR STAINLESS (8 PER CABLE ASSEMBLY) SWAGE FITTINGS CRIMPED TWICE 2PCS PER CONNECTION
C	4	3/16	1/2" SIZE STANDARD DUTY ZINC PLATED OR STAINLESS THIMBLES (1 PER CABLE ASSEMBLY) THIMBLE IS INSTALLED ON TOP OF LOWER CABLE
D	4	3/16	1/2" X 4" DROP FORGED GALVANIZED OR STAINLESS EYE / JAW TURNBUCKLE (1 PER CABLE ASSEMBLY)

F	4	-	ROTATIONALLY MOLDED POLYETHYLENE RESTRAINT CLIPS (4 PCS)
G	4	-	ROTATIONALLY MOLDED POLYETHYLENE LIFTING LUG / CABLE GUIDES (4 INSTALLED ON TANK)

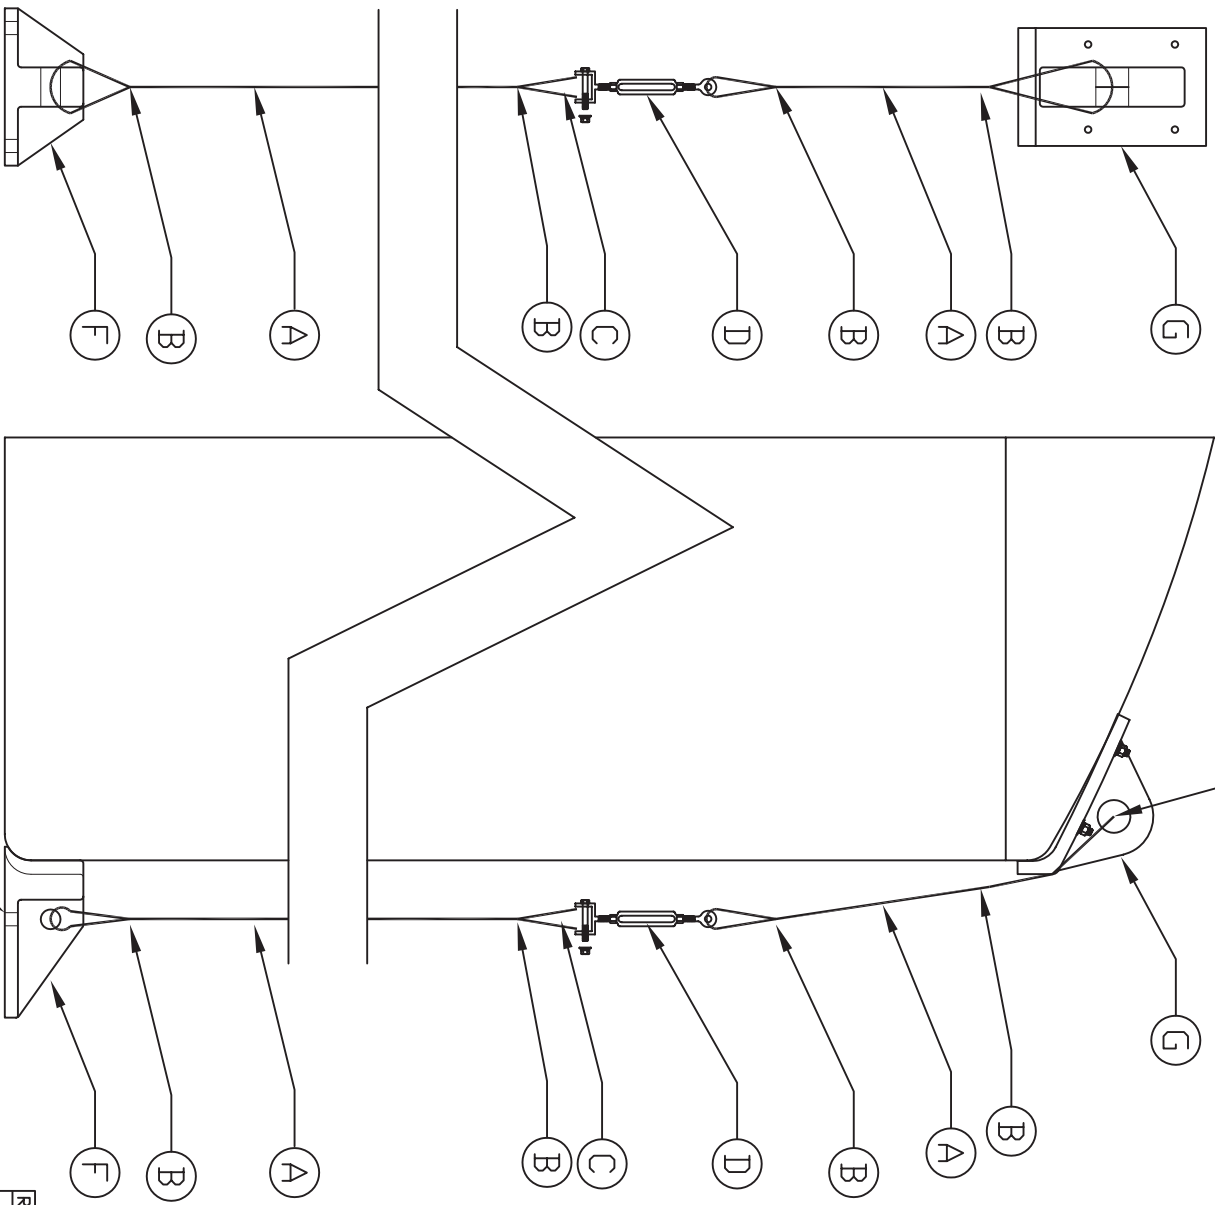

USE TANK OVERALL HEIGHT PLUS 30' TO CALCULATE TOTAL CABLE LENGTH

ANCHOR BOLTS NOT SUPPLIED BY ASSMANN

REV	REVISION DESCRIPTION	REV DATE
<p>SALES ORDER</p>		
<p>300 N TAYLOR ROAD GARRETT, IN 46738 PHONE: (260) 357-3181 FAX: (260) 357-3798</p>		
<p>BRANN, BV SRDVLISDN 4/21/11</p>		
<p>DWG NUMBER: WRPE-ASM</p>		
<p>REV</p>		
<p>ASSMANN CORPORATION OF AMERICA</p>		



Assmann

 CORPORATION OF AMERICA

Polymann

 SYSTEM ASSEMBLY DRAWING